



Metropolis

Textured, simple and tough and designed to look like cement. Metropolis has an extremely natural appearance and is the ideal covering for any interior or exterior surface. This is another tile which has a special anti-bacterial coating to make cleaning so much easier.

COLOUR



Metropolis Tokyo White



Metropolis Shanghai Iron



Metropolis Rio Coffee



Metropolis Paris Amande




Metropolis New York Coal



Metropolis Milan Ecu



Metropolis London Grey

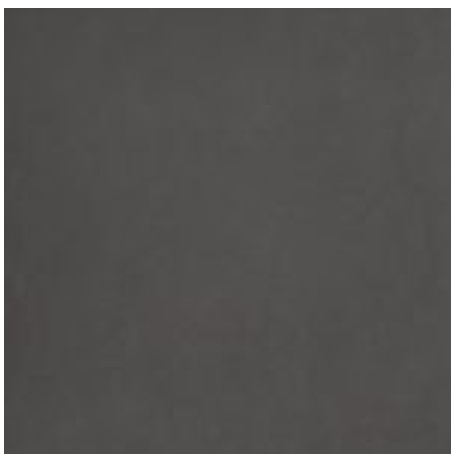

Metropolis Berlin Night

SIZE OPTIONS

	Tokyo White	Milano Ecru	Shanghai Iron	Rio Coffee	Berlin Night	Paris Armande	London Grey	New York Coal
600x600mm Natural	•	•	•	•	•	•	•	•
600x300mm Natural	•	•	•	•	•	•	•	•
600x600mm Textured Grip	•	•	•	•				
600x300mm Textured Grip	•	•	•	•				
900x900mm Textured Grip	•	•	•	•	•	•	•	•
900x450mm Textured Grip	•	•	•	•	•	•	•	•
Special: 750x750mm	•	•	•	•	•	•	•	•

TECHNICAL DETAILS

Product: Metropolis is a full body porcelain stoneware tile. Unglazed, composed of a very fine mixture of quality clay with the addition of feldspar, quartz and kaolion. Manufactured by dry pressing of atomised powders and subsequently sintered by industrial firing at temperatures above 1200°C. The complete vitrification of the tiles allows for a compact, non-absorbent, frost-proof product, resistant to bending, impacts, staining, chemical attacks and thermal shock.

Surface Finish: Naturale, Textured and Textured Grip

Slip Resistance	Natural/Textured	Textured Grip
DIN 51130	R10	R11
DIN 51097	-	Group C

Manufacturing Standard: BS EN 14411G (full details available on request)

Use: All internal/external walls – all finishes.

Variation: V2

Actual Size: Please note that these tiles are supplied with sharp 90 degree edges for installation with a 2 or 3mm grout joint. The dimensions provided above are exact and therefore the grout joint width should be added to reflect the overall module size when preparing setting out drawings.

Installation: We recommend that this range is bedded in a solid bed of polymer modified adhesive in accordance with BS5385: Parts 1, 2, 3 and 4. Adhesive and grouts required may vary in relation to the specific nature of the installation, and proposed substrates. Please enquire with our sales department for further information.



Grout Joint: These tiles should be installed with a minimum 3mm joint on floors and 2mm joint on walls.

Weight per square metre: 24.69 kg/m²