



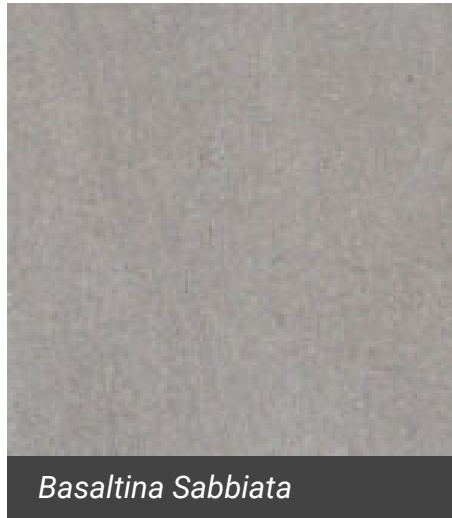

## Basaltina

For low maintenance flooring with a stone effect look, then go no further. Basaltina offers a fantastic range of modern grey-scale tiles. Despite its minimalist appearance, Basaltina provides a classy background to set off any residential or [commercial](#) design scheme. Specifically, kitchens, bathrooms, hallways, offices and other larger spaces. Plus, the collection offers 12mm thick pavers for outside areas and pool surrounds. Basaltina uses the idea of sedimentary rock formation. This creates a smooth but finely textured look to the tiles. Stone has been a huge part of architectural designs for decades. Mainly because of its high durable qualities and versatility in shaping. Hence why it is still a very popular choice for floor and wall tiles.

## COLOUR

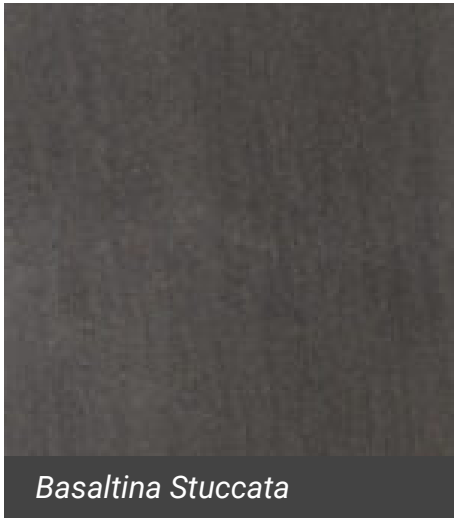

## SIZE OPTIONS

	Natural	Sabbciata	Stuccata
1192 x 595 x 12mm	•	•	•
595 x 595 x 11mm	•	•	•
595 x 295 x 11mm	•	•	•
Battiscopa 595 x 100 x 11mm	•	•	•
Steptread 595 x 350 x 10mm with 40mm fascia on leading edge	•		
Mosaico 1 285 x 285 x 10mm	•	•	•
Muretto 595 x 296 x 10mm	•	•	•

## TECHNICAL DETAILS

**Product:** Basaltina is a full body porcelain stoneware tile. Unglazed and composed of a very fine mixture of quality clay with the addition of feldspar, quartz and kaolion. Manufactured by dry pressing of atomised powders and subsequently sintered by industrial firing at temperatures above 1200°C.

The complete vitrification of the tiles allows for a compact, non-absorbent, frost-proof product, resistant to bending, impacts, staining, chemical attacks and thermal shock.

**Surface Finish:** Each colour has its own surface detail.

Slip Resistance	Naturale	Stuccata	Sabbiata Velvet
DIN 51130	R10	R10	R10
DIN 51097	Class B	Class B	Class B
Pendulum 96 Rubber	Dry: 45 Wet: 16.60	Dry: 57 Wet: 25	-
Pendulum 55 Rubber	Dry: 92.80 Wet: 10	Dry: 105.80 Wet: 13.80	-

**Manufacturing Standard:** BS EN 14411G  
(full details available on request)

**Use:** Floors – all internal floors. Wet/External areas – Sabbiata finishes. Walls – all internal/external walls

**Variation:** V3

**Eco Credentials:** Eco label & 40% pre-consumer recycled content.  
Leed Complaint credit MR4.

**Actual Size:** Please note that all the tile formats have a sharp 90 degree edges for installation with a 3mm grout joint. The dimensions provided are exact and therefore the grout joint width should reflect the overall module size when preparing setting out drawings.

**Installation:** We recommend a solid bed of polymer modified adhesive in accordance with BS5385: Parts 1, 2, 3 and 4. Adhesive and grouts required may vary in relation to the specific nature of the installation, and proposed substrates. Please contact our architectural department for further information or technical specifications.

**Grout Joint:** A minimum 2mm joint on floors and 1mm on walls indoors. 5-6mm outdoors.

**Weight:** 1192 x 595 – 28.33 kg /m<sup>2</sup>  
595 x 595 / 595 x 296 – 24.4 kg /m<sup>2</sup>