



Bioselect

Bioselect unites the textures of Oak and Walnut timbers with the practicality of porcelain. These tiles come in seven different colours. They are also available in many sizes and geometric shapes to accommodate multiple designs. Furthermore, Bioselect offers 20mm thick pavers (subject to size and colour.) These have anti-slip and temperate qualities which make them highly durable and perfect for outdoor spaces. Especially, for outside areas in restaurants and bars, as it creates a warm and comfortable atmosphere. This collection has also been popular with other residential and commercial spaces. Such as hotels, airports, train stations, gardens and living rooms.

COLOUR



Bioselect Walnut Tabacco



Bioselect Walnut Cinnamon



Bioselect Oak Vanilla




Bioselect Oak Natural



Bioselect Oak Ginger



Bioselect Oak Cloves

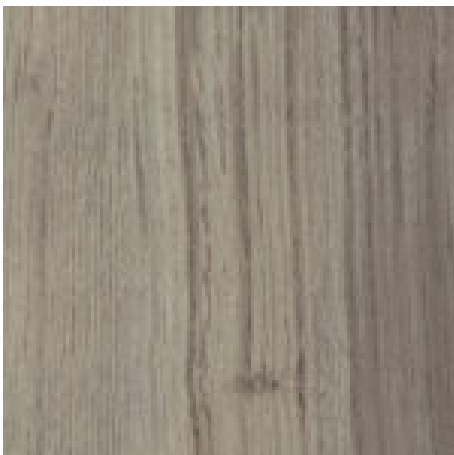

Bioselect Oak Ash

SIZE OPTIONS

	1195x197x10mm Natural	1195x297x10mm Natural	1198x298x20mm Grip	1795x297x12mm Natural
Oak Ash	•	•		•
Oak Cloves	•	•	•	•
Oak Ginger	•	•		•
Oak Natural	•	•	•	•
Oak Vanilla	•	•		•
Walnut Cinnamon	•	•		•

TECHNICAL DETAILS

Product: Bioselect is a through bodied porcelain tile.

Surface Finish: Natural and Grip

Slip Resistance	Walnut Tobacco Natural	All other colours Natural	Oak Natural and Oak Cloves 20mm Grip
DIN 51130	R9	R10	R10
DIN 51097	-	-	Group C
Pendulum 96 Rubber	-	-	Exceeds +36

Manufacturing Standard: BS EN 14411 G
(full details available on request)

Use: Internal and External level surface use for all foot traffic.

Actual Size: Please note these tiles are supplied with sharp 90 degree edge for installation with a 3mm grout joint. The dimensions provided are exact, add the grout joint width to the overall module size when preparing setting out drawings.

Weight per square metre

10mm- 23.6kg/m²

12mm – 27.96kg/m²

20mm – 46.25kg/m²

Installation: Bed this range in a solid bed of polymer modified adhesive in accordance with BS5385: Parts 1, 2, 3 and 4.

Adhesive and grout may vary in relation to the specific nature of the installation, and proposed substrates.

Grout Joint: Install these tiles with a minimum 3mm joint.

Decor: Chevrons, Stripe and Hexagons are available as decor pieces.