




## Lavika

Lavika is a stunning porcelain replication of basalt stone. This collection offers five matt colours that can be mixed with its glossy sister collection Raku. These tiles create the sense of uniformity and offer subdued tones to a space. Its velvet-smooth surface has all the resistance and anti-slip properties needed for use in any residential and commercial context.

**COLOUR**



*Lavika White*

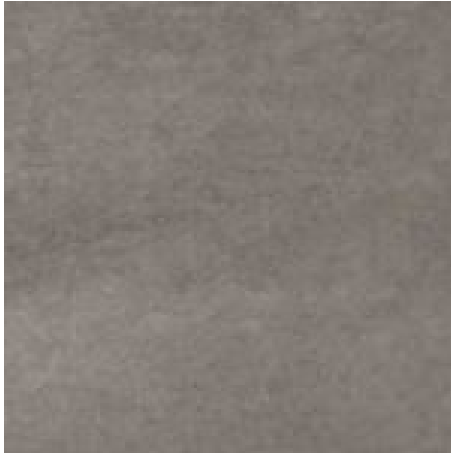

*Lavika Taupe*



*Lavika Sand*



*Lavika Grey*



*Lavika Black*

**SIZE OPTIONS**

	1200x600mm	900x900mm	900x450mm	600x600mm	600x300mm	300x75mm
White	•	•	•	•	•	•
Sand	•	•	•	•	•	•
Grey	•	•	•	•	•	•
Taupe	•	•	•	•	•	•
Black	•	•	•	•	•	•

## TECHNICAL DETAILS

**Product:** Lavika is a full bodied porcelain stoneware tile, unglazed. Composed of a very fine mixture of quality clay with the addition of feldspar, quartz and kaolion. Manufactured by dry pressing of atomised powders and subsequently sintered by industrial firing at temperatures above 1200°C.

The complete vitrification of the tiles allows for a compact, non-absorbent, frost-proof product, resistant to bending, impacts, staining, chemical attacks and thermal shock.

**Surface Finish:** Natural

Slip Resistance	Natural
DIN 51130	R10
DIN 51097	Group B
Pendulum 96 Rubber	-
Pendulum 55 Rubber	-

**Variation:** V3

**Manufacturing Standard:** BS EN 14411 G  
(full details available on request)

**Use:** All internal/external walls and floors for both residential and commercial.

**Weight per square metre**  
10mm- 23.6kg/m<sup>2</sup>

**Installation:** We recommend that this range is bedded in a solid bed of polymer modified adhesive in accordance with BS5385: Parts 1, 2, 3 and 4. Adhesive and grouts required may vary in relation to the specific nature of the installation, and proposed substrates.

**Grout Joint:** Install with a minimum 2mm